

marantz®



NR1200 MARANTZ NR1200 2CH SLIM STEREO RECEIVER

Indulge in high-resolution sonic perfection with the Marantz NR1200 two-channel slim stereo receiver that powers detailed, high-fidelity audio from a compact chassis. At half the height of a traditional receiver, the NR1200 drives impeccable sound for your movies, shows, Hi-Fi audio and more. The NR1200 supports the latest HDMI connectivity with its 5 inputs, each one supporting HDCP 2.3, 4K Ultra HD 60Hz video, HLG and more. Stream music from leading music services and control the NR1200 with voice control compatibility via Amazon Alexa, Google Assistant and Apple Siri.

Custom Integration Features

New for 2019

- OvrC smart remote management support
- All Zone Stereo (Party Mode) ON or OFF from smart select selection
- Airplay deactivation from setup menu
- HDMI Multiple input assign: allow to listen to multiple audio sources while keeping the same video content
- HDMI Auto input rename (when information available from source player)

Other

- Speaker A/B
- Zone 2 Pre-out
- HDMI diagnostic built-in the unit to test your cables and devices compatibility
- Smart remote Management: Domotz, Ihiji, OvrC
- Web UI configuration interface
- IP control (AMX /Crestron Command/Control 4)
- Control 4 certified
- Remote control jacks for external IR receiver operation
- Panel lock function
- Remote lock function
- Setup lock function
- Remote control in/out
- Dealer memory storage on external USB
- Optional rack mount kit available (RMK1501NR)



domotz



ihiji

Control4



because music matters

NR1200

MARANTZ NR1200 2CH SLIM STEREO RECEIVER






POWER AMPLIFIER RATED OUTPUT

Front	75 W + 75 W (8 Ω/ohms, 20Hz – 20kHz, 0.08% T.H.D.)
Output Connectors	4 – 16ohm
Operating Temperature	41 °F – 95 °F (5 °C – 35 °C)
Power Supply	AC 120V, 60Hz – inlet type
Power Consumption	210W
Power Consumption in Standby Mode	0.2W when “Network Control” is set to “Off in Standby” and “HDMI Pass Trough” is set to “Off”
Power Consumption in CEC Standby	0.5W
Weight (lbs)	17.7

UPC

NR1200U1B	Black	699927251659
-----------	-------	--------------

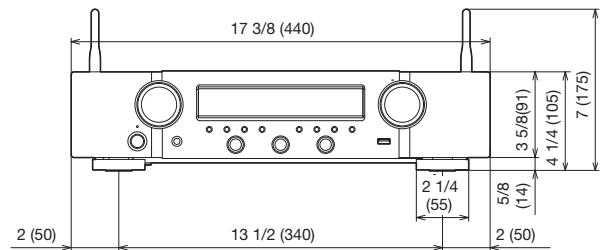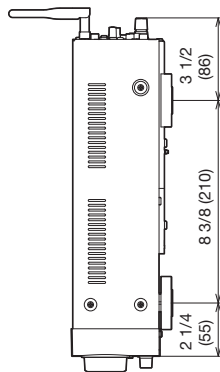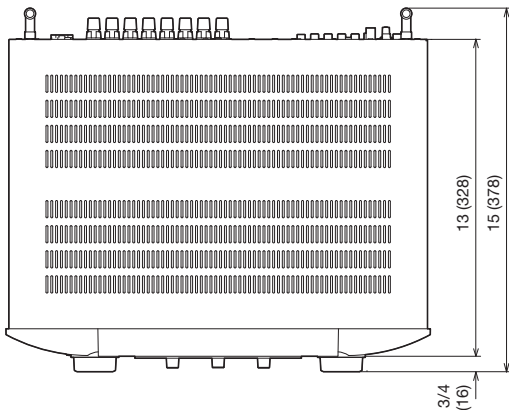

Sound United
1 Viper Way
Vista, CA 92081
United States

www.marantz.com

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by D&M Holdings Inc. is under license. The Spotify software is subject to third party licenses found here: www.spotify.com/connect/third-party-licenses. Other trademarks and trade names are those of their respective owners. Marantz is a trademark or registered trademark of D&M Holdings, Inc.

* All specs can be subject to change.