# **JP3030DJ/TJ**

# GE® 30" Built-In Knob-Control Electric Cooktop

### **DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)**

**IMPORTANT:** Requires a 5" free area between the bottom of the cooktop to any combustible material, i.e., shelving. Free area not required when installing wall oven underneath cooktop. Refer to installation instructions. Requires a 15" minimum from cooktop to adjacent overhead cabinets. Units are furnished with a 48" flexible armored cable.

**NOTE:** 30" Ribbon cooktops are approved for use over select GE 27" and GE 30" Single Wall Ovens and Warming Drawers. Refer to cooktop and wall oven/warming drawer installation instructions packed with product for current dimensional data. If installed with a GE Telescopic Downdraft System, consult both the cooktop and downdraft installation instructions packed with product before installing. Cooktop gas/electric supply may need to be re-routed to install downdraft. The countertop cutout requires 23-1/2" minimum flat countertop surface and 25" minimum total countertop depth. In addition, other clearances to front edge of the countertop must be considered. Before installing, consult installation instructions packed with product for current dimensional data.


**CUTOUT FILLER TRIM KIT:** A filler trim kit is available for use if your countertop cutout is larger than the dimension shown, up to 29-13/16" x 20-7/16". Order JXTR32B for black or JXTR32W for white, to reduce the cutout opening for installation of this cooktop. These kits may be ordered from your GE Appliances Dealer.

## overhead cabinets (when no APPROXIMATE COOKING DIMENSIONS hood or microwave is installed) 3-1/4" at front of unit and Cooktop 4" at conduit 19-5/8" to 30" MIN. from countertop to 15" MIN. height from countertop unprotected cabinet (when to nearest cabinet (including no hood or microwave is light rails) on both sides of 1-3/4" MIN cookton 2-1/2" MIN. Electrical junction box 16" MIN. below counterton

#### **INSTALLATION ABOVE A WALL OVEN**

template when cutting the opening in the counter

To insure accuracy, it is best to make a



VOLTAGE (60HZ AC)	240V	208V
CONNECTED LOAD (MAX.)	7.4kW	5.6kW
CURRENT DRAW (MAX.)	30.8 Amps	26.7 Amps
RECOMMENDED CIRCUIT BREAKER	40 Amps	30 Amps

\*NOTE: Check local codes for required breaker size.

2" MIN. clearance

to side wall from cut-out

on left sides of unit and

1-1/2" clearance on right side of unit

13" MAX. depth of unprotected



For answers to your Monogram, GE Café<sup>™</sup> Series, GE Profile<sup>™</sup> Series or GE Appliances product questions, visit our website at geappliances.com or call GE Answer Center<sup>®</sup> Service, 800.626.2000.







# JP3030DJ/TJ

# $GE^{\tiny{(8)}}$ 30" Built-In Knob-Control Electric Cooktop

### **FEATURES AND BENEFITS**

Four radiant cooking elements

Power Boil elements

Keep warm setting

Melt setting


Hot surface indicator lights

Cooktop "on" indicator light

Fit Guarantee

Model JP3030TJWW - True white

Model JP3030DJBB - Black on black

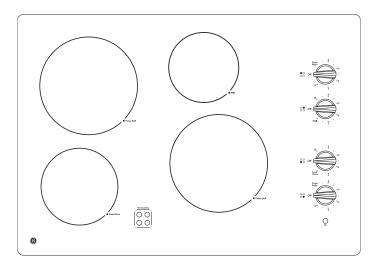

### **GUARANTEED FIT**

Replacing a similar cooktop from GE Appliances or another brand? GE cooktops are guaranteed for an exact fit or GE Appliances will pay up to \$100 toward modifications

Visit geappliances.com for more info

