











Hardware List (included in GKE154F)

	6 PCS Machine Bolts(1-1/4")		3 PCS (1-1/4") Flat Head Wood Screw
	4 PCS Wood Dowels (Ø8x25mm)		10 PCS (3/4") Flat Head Wood Screws

GKE154FT Parts List

E	DESK TOP	1 PC
		

GKE154FB Parts List



A	PEDESTAL	1 PC	B	PEDESTAL	1 PC	C	BACKPANEL	1 PC
								
D	CROSS BAR	1 PC	F	DROP FRONT CENTER DRAWER	1 PC			
								

Notes: Need two people to assemble.


Instructions:

Turn the pedestals ① and ② upside down.


1. Move the pedestal ① and pedestal ② to the desired location, use **(1-1/4") machine bolts** (6 PCS) to connect backpanel ③ to the pedestals ① and ②.
2. Connect center Cross Bar ④ to the pedestals ① and ②, carefully turn the desk straight up and tighten Cross Bar with **(1-1/4") flat head wood screw** (2 PCS).

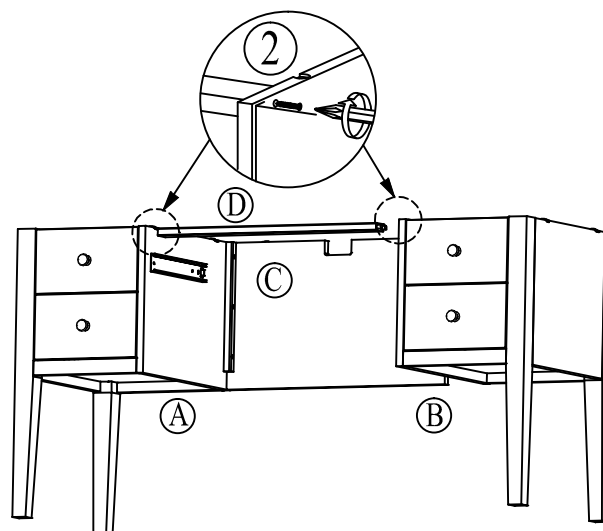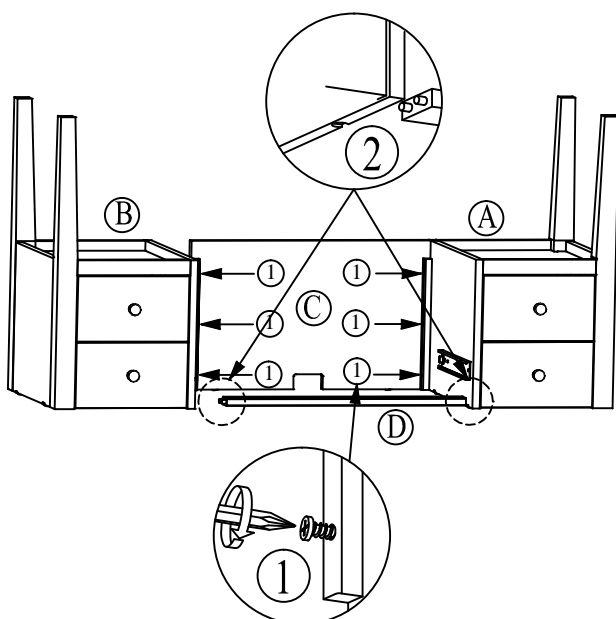

3. Insert two **wood dowels** (4 PCS) in each pedestal (A) and (B).
4. Loosen the screw to adjust **metal figure 8** (10 PCS) of its direction of the panel and re-screw.

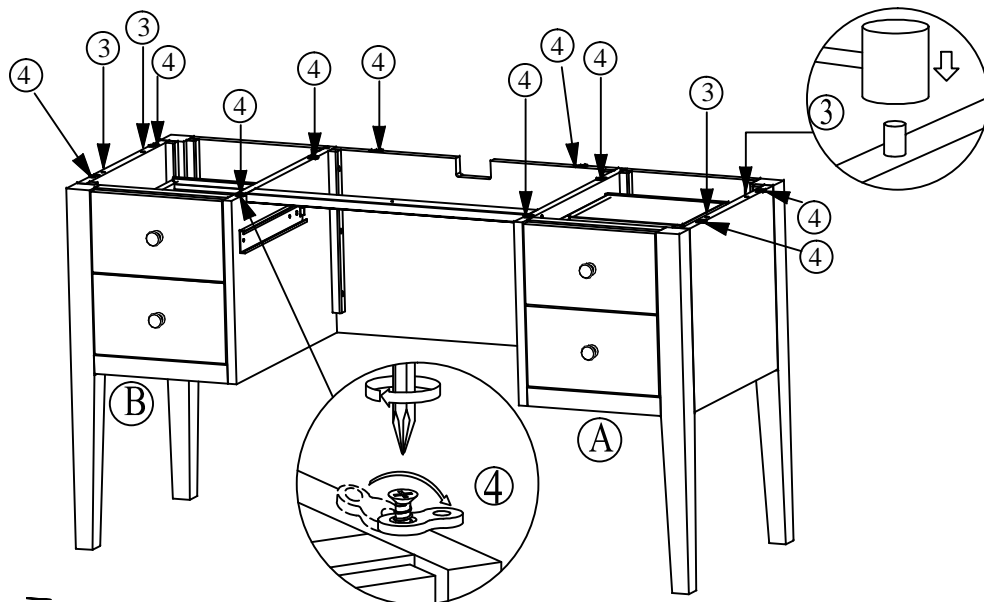



5. Insert (3/4") **flat head wood screws** (10 PCS) through metal figure 8 bracket to connect desk top (E) and pedestals (A) and (B). Use (1-1/4") **flat head wood screws** (1 PC) to connect cross bar (D) to desk top (E).

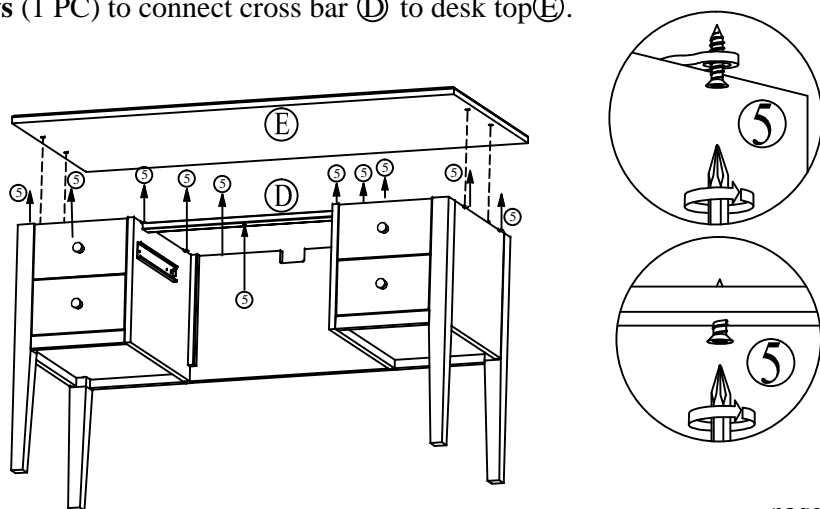

6. Install the Drop Front center Drawer (F) to place.

Important:

(Be sure to move the ball bearing retainer all the way to the front of the glide and carefully slide the rails into the glides and ball bearing retainer.)

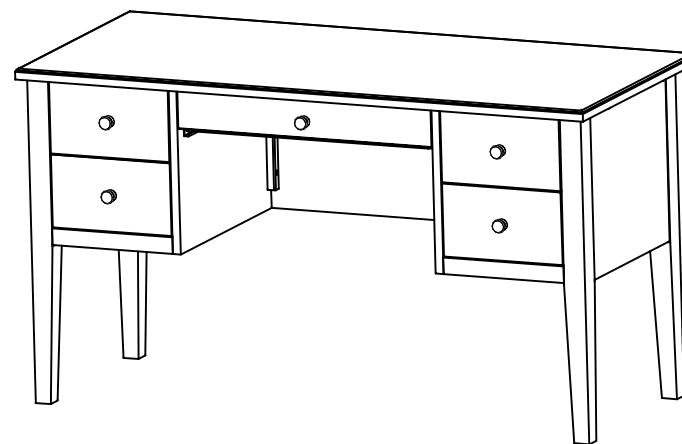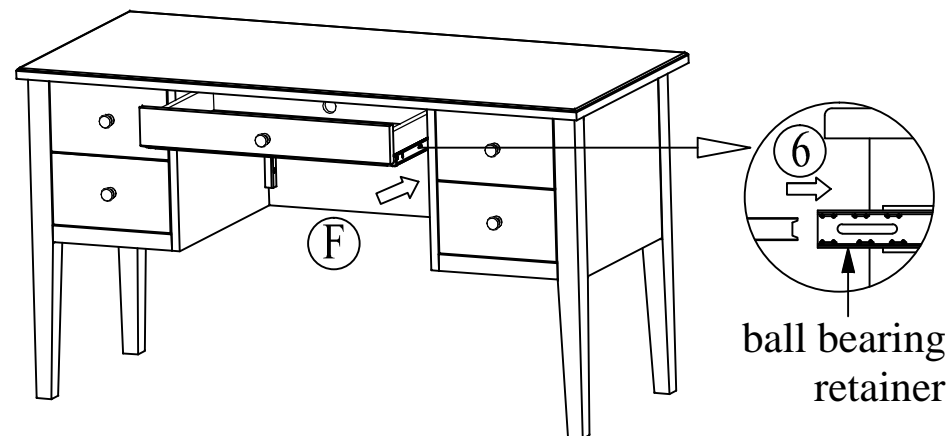

Assembly is now complete.