



# SEU122B



Product Family	Hob
Built-in type	Ultra-low profile
Dimensions	12"
Power supply	Electric
Type	Ceramic
EAN code	8017709240929

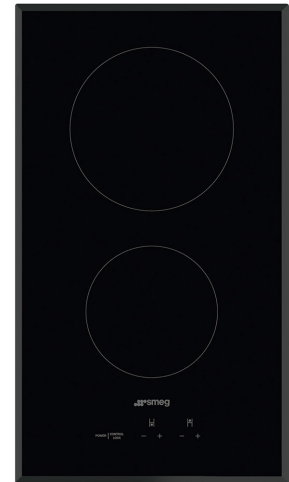

## Aesthetics



Aesthetic	Universale
Colour	Black
Finishing	Glass
Material	Glass
Glass type	Ceramic
Glass edge	Angled edge
Type of control setting	Digi Touch
Control knob position	Front
Serigraphy colour	Grey

## Programs / Functions



Total no. of cook zones	2
No. of ceramic cook zones	2
No. of cooking zones with booster	2
Power levels	9

## Technical Features



Front-centre - Ceramic - Single - 1.00 kW - Ø 14.8 cm  
Rear-centre - Ceramic - Single - 1.40 kW - Ø 18.4 cm


Residual heat indicator Yes

Automatic switch off when overheat Yes

Automatic switch off when overflow Yes

## Electrical Connection

Electrical connection rating (W)	2400 W	Frequency (Hz)	60 Hz
Current	22 A	Power supply cable length	47 1/4 "
Voltage (V)	120 V	Terminal box	3 poles
Type of electric cable	Single phase		

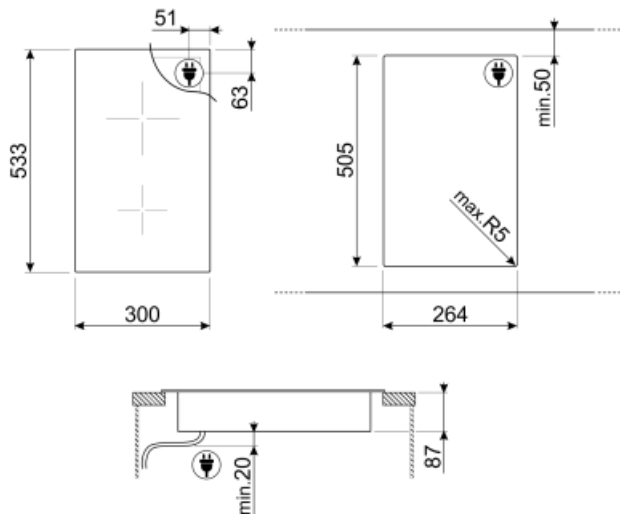

## Not included accessories

---










### SCRP

Non-scratch hob scraper - suitable for induction and ceramic hobs

---

## Symbols glossary (TT)

---

	Power booster: option allows the zone to work at full power when very intense cooking is necessary.		Ultra-low profile: Installation of product with flat edge - height of 1 mm.
	Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.		Glass ceramic: The base of the hob is made glass ceramic. Heating is performed by the heating elements Hi-Light.
	Overfill protection: The special overfill protection shuts down the stove in the presence of overflow of liquids.		Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.
	Touch control		