B3007ECO 30" Built-in Multi-Function Oven



B3007ECO

30" Built-in Multi-Function Oven



OVEN PROGRAMS

- 30" (76cm) wide stainless steel oven
- MaxiKlasse[™] 120L (4.3 cu.ft) capacity
- Side halogen light
- 9 cooking functions including True Fan convection
- ThermiC° hot air cooking technology for perfect cooking
- Heavy duty chrome racks
- Retractable control knobs
- Power ventilated glazed door panels
- Removable door and glass panes for easy cleaning
- Degree C temperature display



Specifications (Column Installation)

B3007FCO

OVEN DIMENSIONS

- W: 29^{3/4}" D: 22^{3/4}" H: 24^{7/16}"
- W: 756 mm D: 578 mm H: 620 mm

CUT-OUT DIMENSIONS

2"

eave 4" (10.16cm) of shelf

shelf materi nd void cut-

- W: 28^{7/16}" D: 22^{1/4}" H: 23^{3/16}"
- W: 723 mm D: 565 mm H: 614 mm

CONDO ELECTRICAL REQUIREMENTS

208 Volt, 60Hz, 3460 Watt, 20 AMP

HOUSE ELECTRICAL REQUIREMENTS

240 Volt, 60Hz, 4580 Watt, 30 AMP

31" sq. 200cm² Airflow 5.08cm False Back 281/24 243/16 171/2" 724mm 614mm 445mm 283/8 Void Cut-out 721mm 243/8" 619mm 24"

610mm

217/8/

555mm

13/16" 21mm 2913/16

758mm

IMPORTANT

- AEG ovens are supplied with a 5' long electrical cable and must be hard wired to the electrical supply
- AEG ovens uses the following wires: **RED & BLACK: Live Wires GREEN: Ground** The Neutral (White) wire is not required for the electrical installation.

VOID CUT-OUT

- If the oven is mounted in a tall or semi-tall cabinet, there must be a minimum gap of 19/16" (4cm) cut out of the shelf and behind the upper cabinet to allow air to flow freely
- A void must be cut-out in the shelf of the cabinet. Leave 4" of shelf material around the void.
- Additional support must be added to the shelf with the void. The support must be able to withstand the oven weight.
- If sufficient air flow is not provided, the life of the appliance will be shortened.
- Cut-out in the toe kick is optional and recommended.
- Optional bottom vent grill (7427640) available.



221/4 565mm

18" 457.2mm


Air Vent 31 in.2 (200 cm²)

Specifications (Under Counter Installation)

B3007ECO

AIR FLOW REQUIREMENTS

- If the oven is being placed under the counter, there must be a minimum gap of 1^{9/16}" (4cm) cut out of the shelf behind the oven to allow air to flow freely.
- If sufficient air flow is not provided, the life of the appliance will be shortened.
- Cut-out in the toe kick is optional and recommended.
- Bottom vent grill (7427640) available.

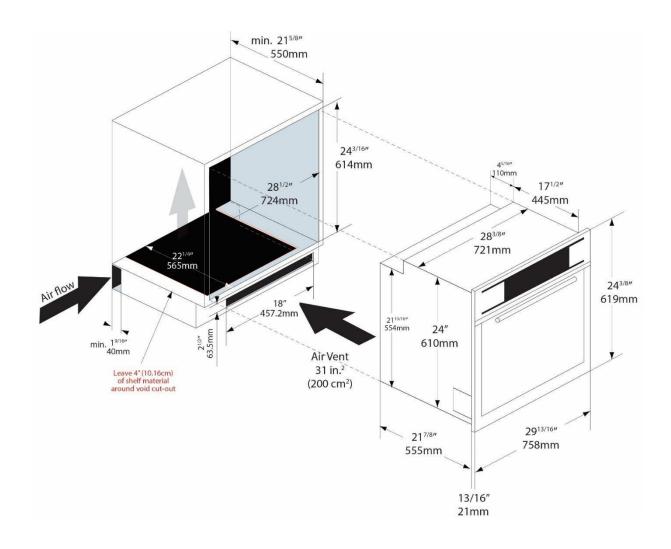



AEG

AEG Appliances are designed and manufactured to the highest standards. Each appliance is covered by a comprehensive 2-year parts and labour warranty.

Refer to product warranty policy for complete terms and conditions.

FOR PARTS AND SERVICE

Euro-Parts & Service 39822 Belgrave Road, Belgrave, ON. NOG 1E0 1 800 678 8352 (Canada) • 1 800 561 4614 (U.S.) www.euro-parts.ca • parts@euro-parts.ca • service@euro-parts.ca

AEG appliances are imported and distributed in North America by Euro-Line Appliances Inc. For more information, please visit one of our showrooms or <u>www.euro-line-appliances.com</u> <u>www.elawest.com</u>

EURO-LINE APPLIANCES INC.

871 Cranberry Court Oakville, ON L6L 6J7 Canada 905 829 3980 1 800 421 6332 marketing@euro-line-appliances.com

EURO-LINE APPLIANCES WEST INC.

2912 West 4th Avenue Vancouver, BC V6K 1R2 Canada 604 235 3980 1 855 ELA WEST (352 9378) info@elawest.com

