


BUILT-IN/COUNTERTOP MICROWAVE OVEN JMC1116A – 21¾" x 13" x 17¾"

PRODUCT DIMENSIONS




FRONT VIEW

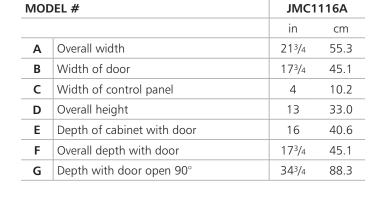



TOP VIEW




SIDE VIEW



BUILT-IN/COUNTERTOP MICROWAVE OVEN JMC1116A - 213/4" x 13" x 173/4"

OPENING/CLEARANCE DIMENSIONS

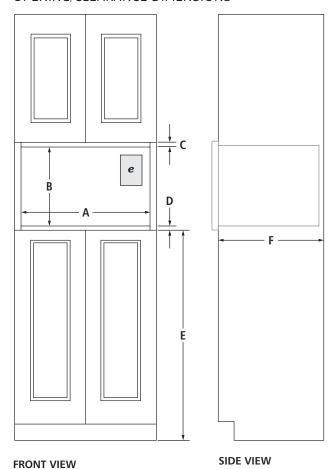

MODEL #		JMC1116A				
		in	cm			
Α	Width of cutout	231/8	58.7			
В	Height of cutout (minmax.)	17-17 ¹ /8	43.2-43.5			
С	Top of cutout to bottom of upper cabinet (min.)	2	5.1			
D	Bottom of cutout to top of single oven (min.)	3	7.6			
	Bottom of cutout to top of cabinet door (min.)	1 ⁵ /8	4.0			
E	Recommended height from bottom of cutout to floor	36	91.4			
F	Depth of cutout (min.)	22³/4 57.8				
е	Recommended electrical connection location					

NOTE: Trim kit frame extends 1¹/₁₆" (2.7 cm) above and below the cutout opening.


ELECTRICAL REQUIREMENTS

120 volt, 60 Hz, AC only, 15- or 20-amp fused, electrical supply is required. A time-delay fuse or dedicated circuit is recommended. Minimum length of power cord is 30" (76.2 cm). Do not use an extension cord.

VENTING REQUIREMENTS

If microwave oven is built in, a trim kit is required for proper ventilation.

TRIM KIT DIMENSIONS



MODEL #		MK2160		MK2167	
		in	cm	in	cm
Α	Overall width	293/4	75.6	26 ⁷ /8	68.2
В	Width of opening	223/4	57.8	223/4	57.8
С	Height of opening	121/4	31.1	121/4	31.1
D	Width of frame	31/2	8.9	21/16	5.2
E	Overall height	19 ¹ /8	48.6	19 ¹ /8	48.6
F	Height of frame	37/16	8.7	37/16	8.7
G	Depth of frame	1 ³ / ₁₆	3.0	1 ³ / ₁₆	3.0

