




## Component Rack Mounting Kit

RFK-20 & RFK-26 SERIES MODEL

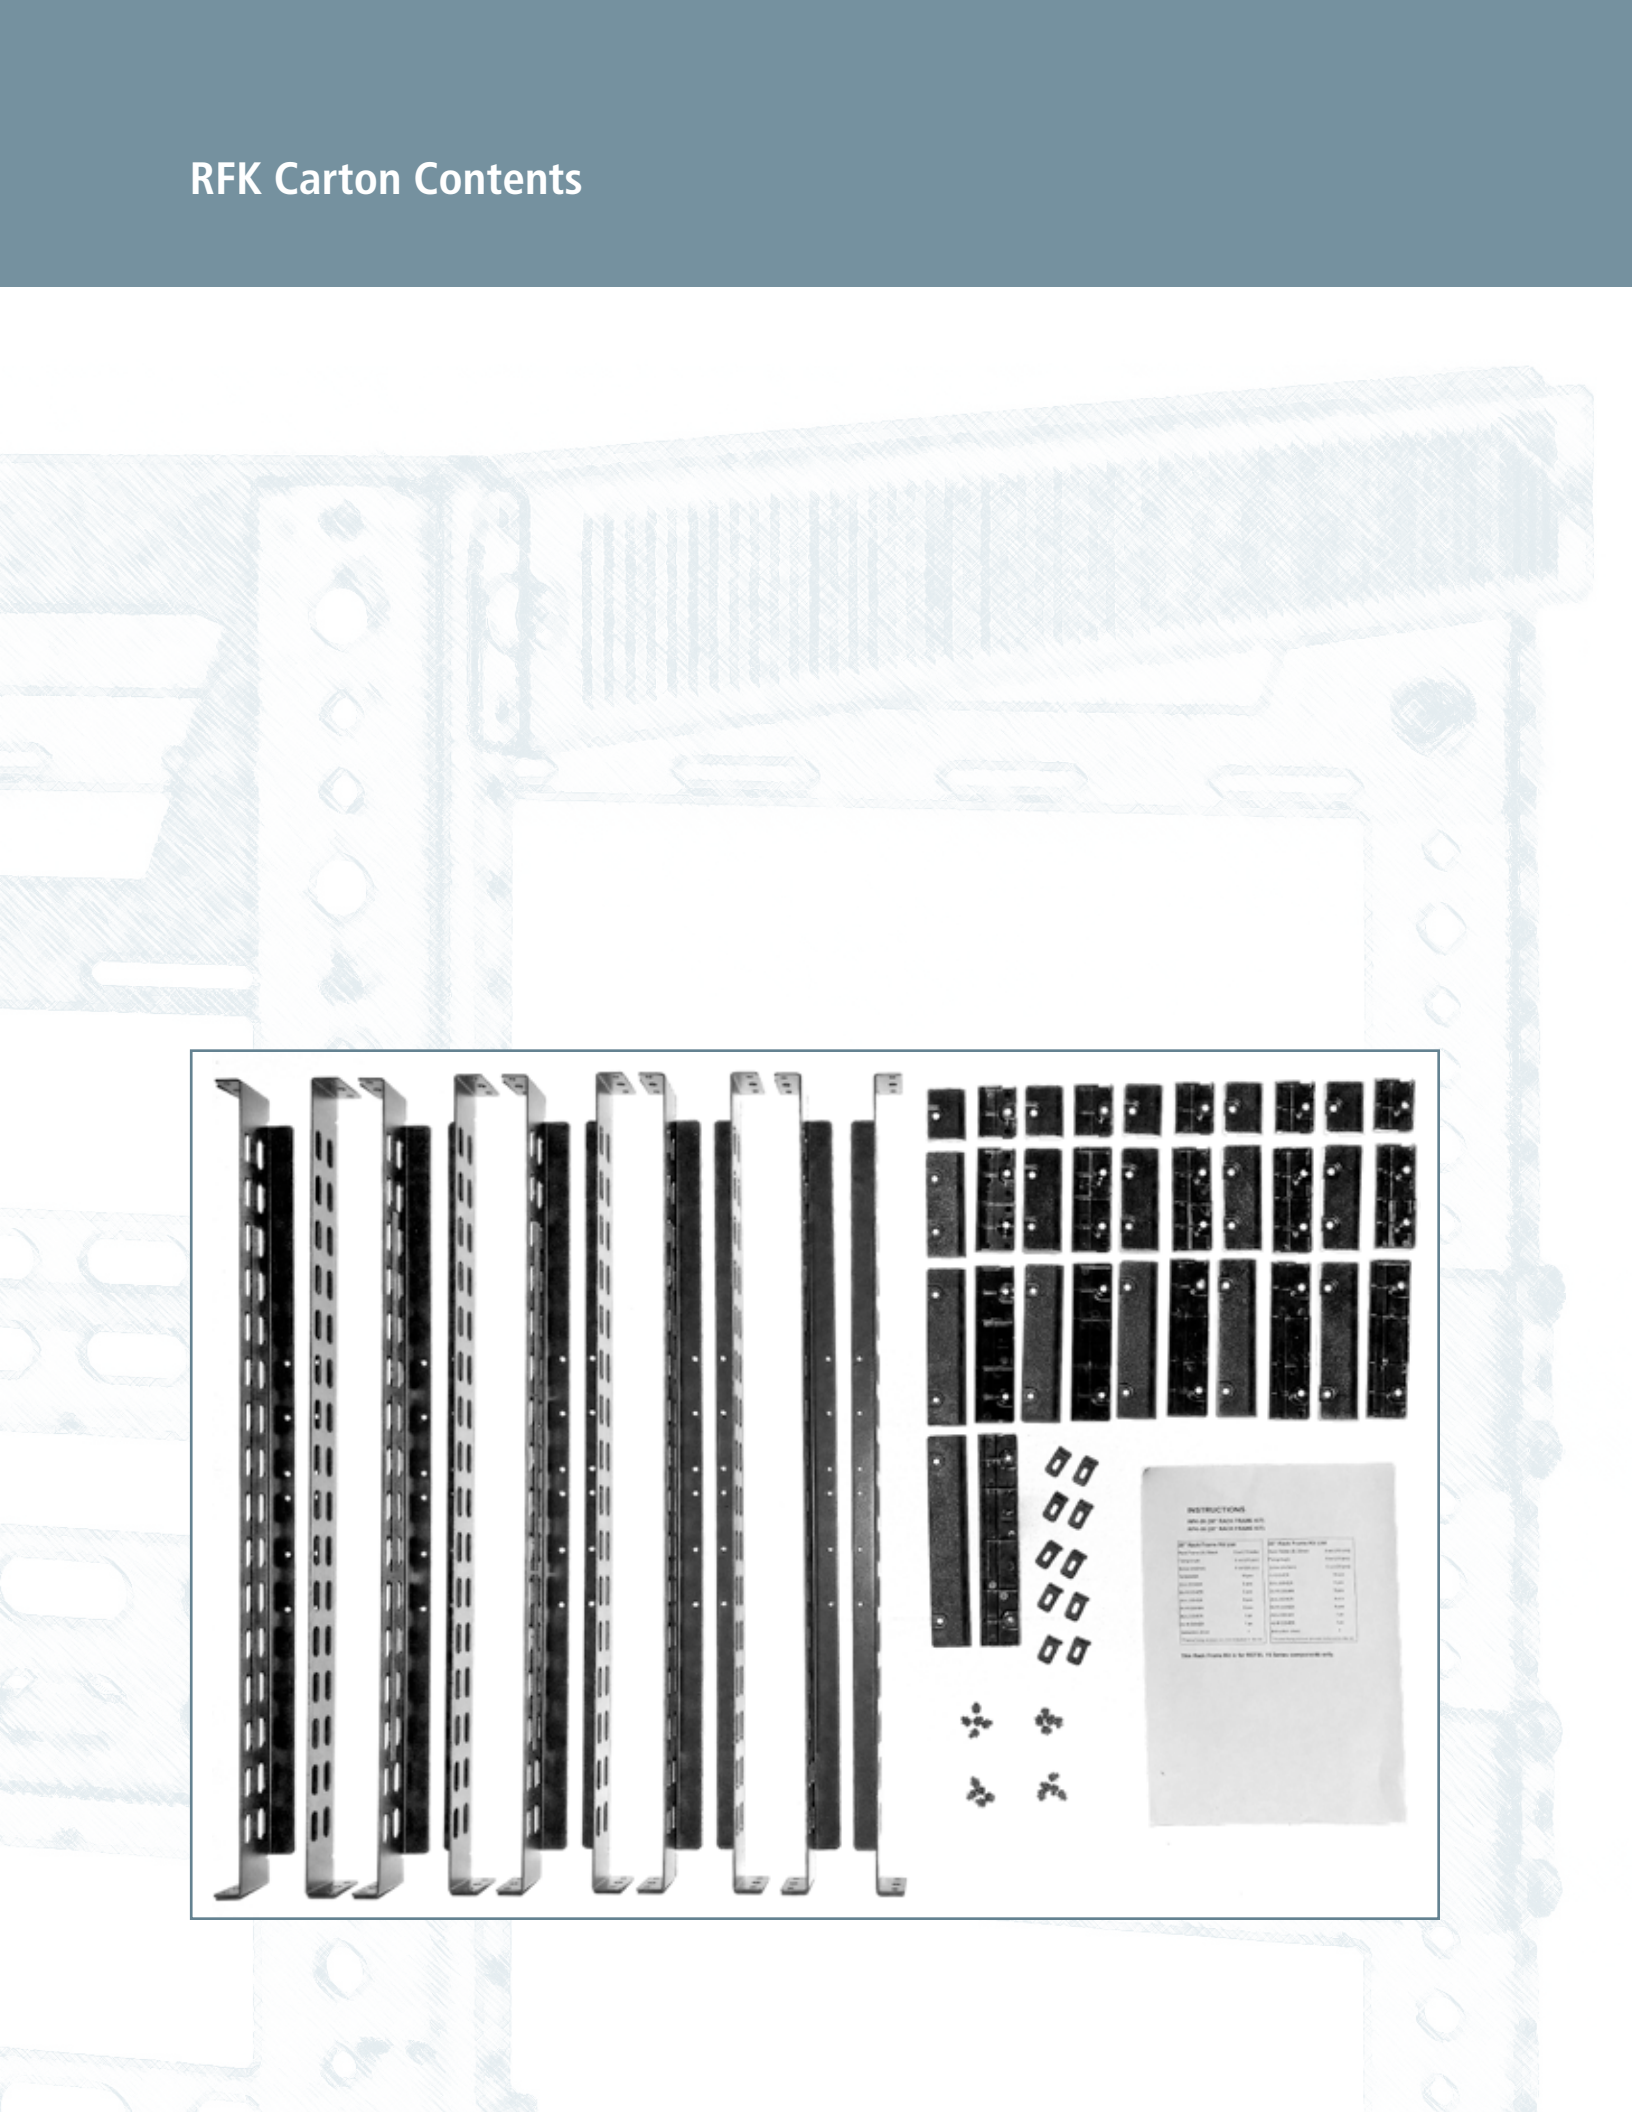

[illegible]

# Component Rack Mounting Kit

## RFK-20 & RFK-26 SERIES MODEL

Rotel has designed the 15 Series in standard U-heights, with the only exceptions being the RSX-1550, RCX-1500, RA-05SE, and RCD-06SE. Our RFK rack kit optimizes the use of rack space and provides a beautiful finished appearance, while also securing the components for transport. The low cost of the RFK kits compare very favorably to using shelves and face plates, allowing you to put more of your client's budget where it really counts—audio quality.

### What is in the RFK Kit?

Each kit contains five pairs of rails and 32 finishing trim pieces (16 pairs) in various U heights—enough to mount five components using different size front panels. Each kit comes complete with 5 x 1U, 5 x 2U, 5 x 3U, and 1 x 4U and provides many different mounting options.

For example, you could mount the following items with one RFK kit:


1 x RSX 1560	4U	Or	4 x RB 1510	1U	Or	3 x RMB 1575	3U
1 x RMB 1575	3U		1 x RSP 1570	3U		2 x RMB 1562	2U
1 x RB 1572	2U						
1 x RMB 1512	3U						
1 x RDG 1520	2U						

RFK20 kits should be ordered for 20" to 25" racks. A RFK 26 should for 26" deep racks. Note: When using the RFK 20 in a 25" deep rack, you must order a Mid-Atlantic rear rack rail system.

### Detailing the front of the rack

Each kit comes with trim plates for the front of the rack which, when properly installed, stop the product from shifting forward. If additional trim plates are required for the job please call 800-370-3741 and dial extension 251.

Here is a complete list of Rotel U heights, which may also be found on the price list.

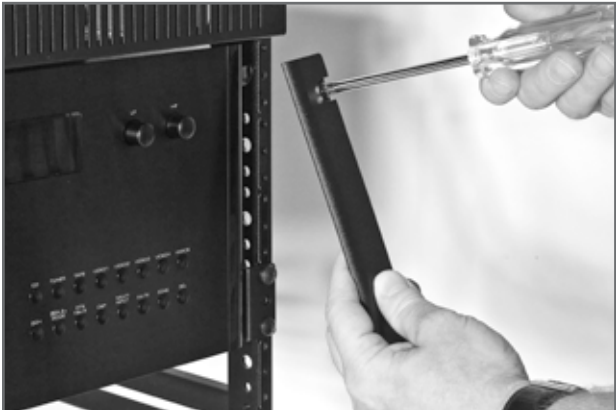

RB 1510	1U	RSP 1570	3U
RA 1520	2U	RMB 1575	3U
RB 1562	2U	RB 1582	3U
RB 1565	2U	RB 1552	3U
RB 1572	2U	RMB 1506	3U
RC 1580	2U	RMB 1512	3U
RC 1550	2U	RSX 1560	4U
RCD 1520	2U	*RSX 1550, RA 05SE, RCX 1500 and RCD 06SE are not a U height models	
RDG 1520	2U		



# How to rack a Rotel 15 series model


1

Position the Rotel RFK 20 or RFK 26 in the rack according to the U height markings.




2

Use two 10-32 pan head screws for the rail front (leave a little loose).

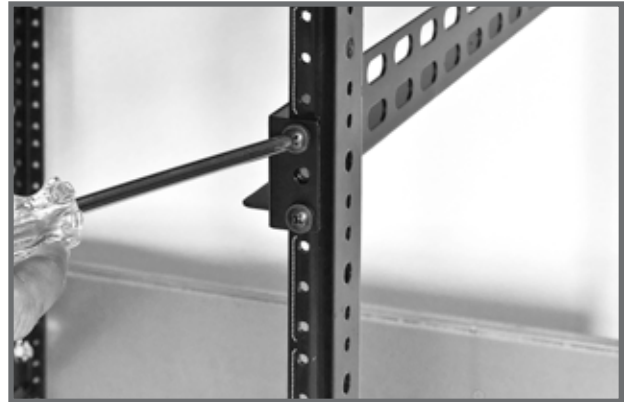

3

Fully secure the rail back with two more screws and then tighten the front.

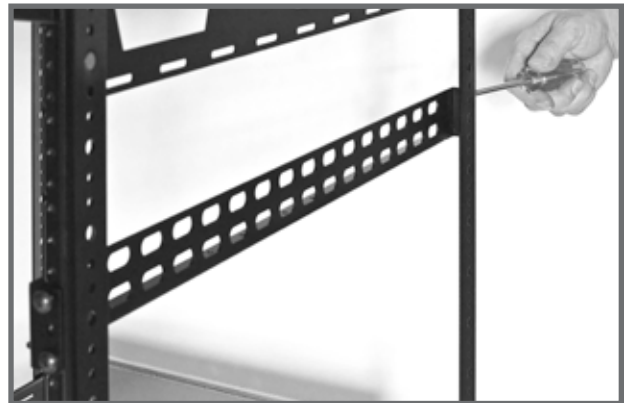


4

Install the remaining rails into the rack.



5

Remove the equipment feet.

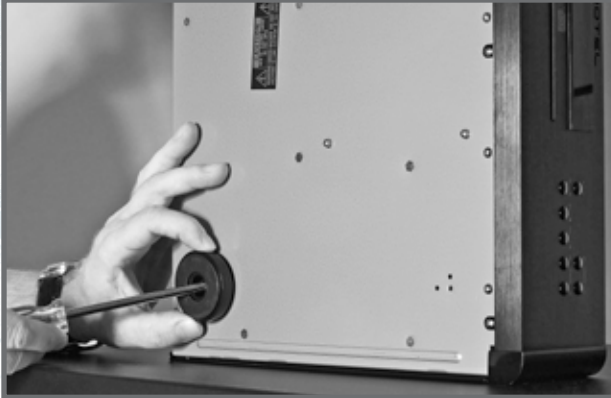


6

The Rotel 15 Series models will fit to a precise depth on the RFK 20/26 rails.




7

Attach the supplied "L" brackets to the back of the 15 Series models.

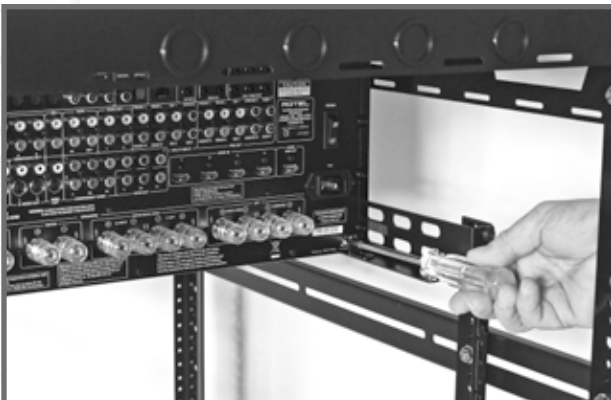

8

Secure the "L" brackets to the rail.

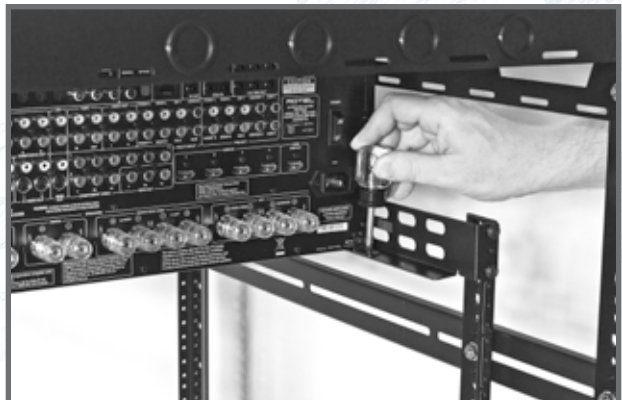



# How to rack a Rotel 15 series model

9

Notice that the trim plates (except for 1U) are notched for a tight fit. Trim pieces are labeled left and right on the inside of the trim piece.




10

Use the same pan head 10-32 screws to attach the trim plates.



11

Rotel 15 Series installed in a Middle Atlantic rack with RFK 26 rails.

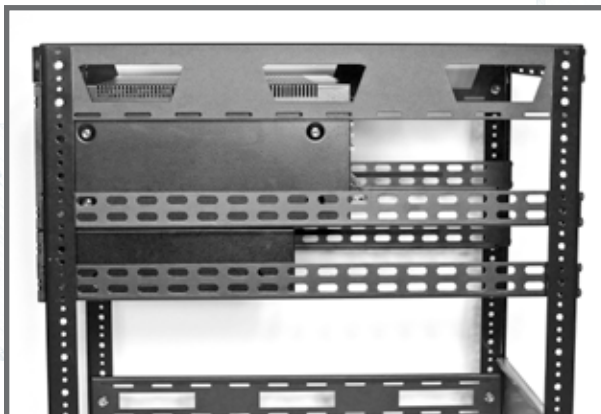

# Rear Rack Rail Installation

Components mounted in the rack between shelves are a “snug” fit so there is minimal movement if the rack needs to be turned on its back for transportation. However, for added security use long tie-wraps to secure the components. (Available from any hardware store.)

All parts are available separately and may be ordered through the service department.

**12**

Install the Middle Atlantic rear rack rail system so that the U height labels coincide with the front of the rack. Position the Rotel RFK 20 or RFK 26 in the rack according to the U height markings.




**13**

Use two 10-32 pan head screws for the rail front (leave a little loose).



**14**

Install the Middle Atlantic rear rack rail system so that the U labels coincide with the front of the rack.

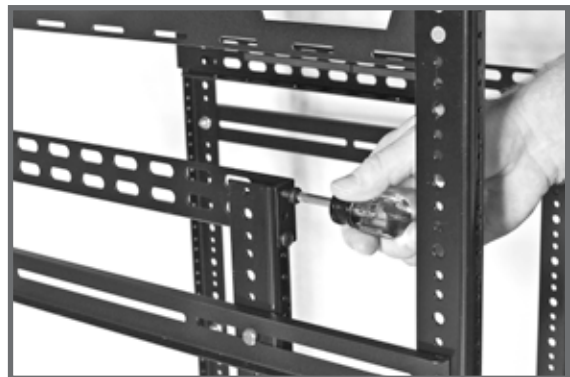

**15**

Complete assembly as with the standard rack.



Copyright © 2009  
Rotel of America  
All rights reserved.

Information contained here may not be reproduced in  
whole or in part without our express written permission.

54 Concord Street  
North Reading, MA • USA • 01864-2699  
Sales & Service: 800-370-3741 • 978-664-3820  
Fax: 978-664-4109  
[www.rotel.com](http://www.rotel.com)

